




Precision Plumbing Products
"Specify with Confidence - Install with Pride"

MINI - MAX
"AA" COMPRESSION MINI WATER HAMMER ARRESTOR

www.pppinc.net

3/8" COMPRESSION "T"

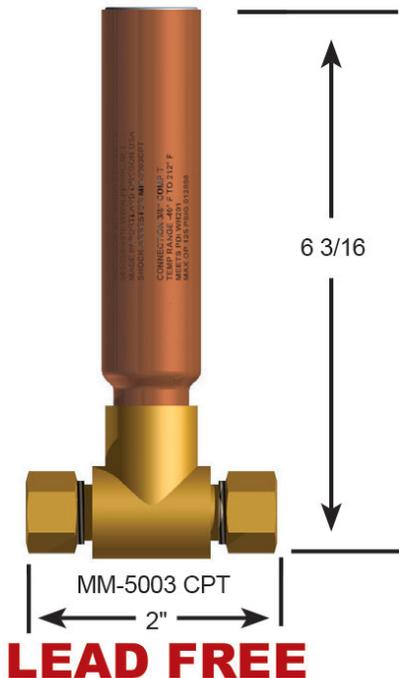

INSTALLATION: May be installed in new or existing plumbing systems with a standard pipe tee.

MAINTENANCE: Maintenance free – the piston is the only moving part.

TEMPERATURE RANGE: 32°F to + 212°F (0°C to + 100°C)

CONSTRUCTION: Barrel-fabricated of type "L" hard drawn copper.

Cap: Machined of free turning brass.

Tee: Attached to barrel with 95-5 solder.

Piston: Polycarbonate Dow Calibre 2061-15 MFR.

Seals: "O"rings: EPDM.

Seal Lubricant: Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

OPERATING PRESSURE: Designed to operate on all domestic and commercial systems. Normal operating pressure 35 to 125 PSI. Max Spike pressure 250 PSI.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

Precision Plumbing Products
 Division of JL Industries, Inc.

802 SE 199th Avenue
 Portland, Oregon 97218
 T (503) 256-4010
 F (503) 253-8165
 www.pppinc.net



Patent No 3,633,627

NSF/ANSI 61 Certified



Rev 02/20