



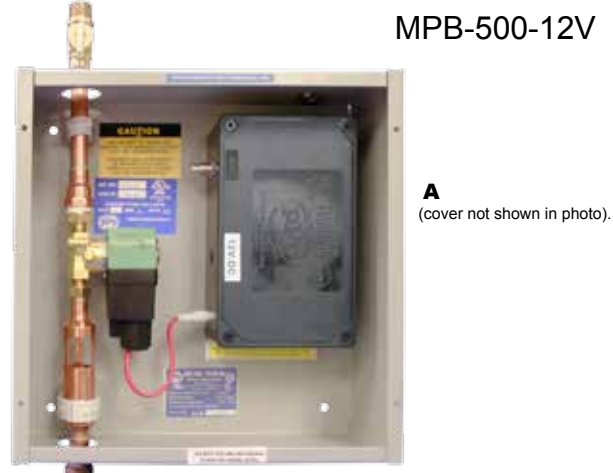

Precision Plumbing Products
"Specify with Confidence - Install with Pride"

MINI-PRIME BATTERY OPERATED TRAP PRIMING MANIFOLD

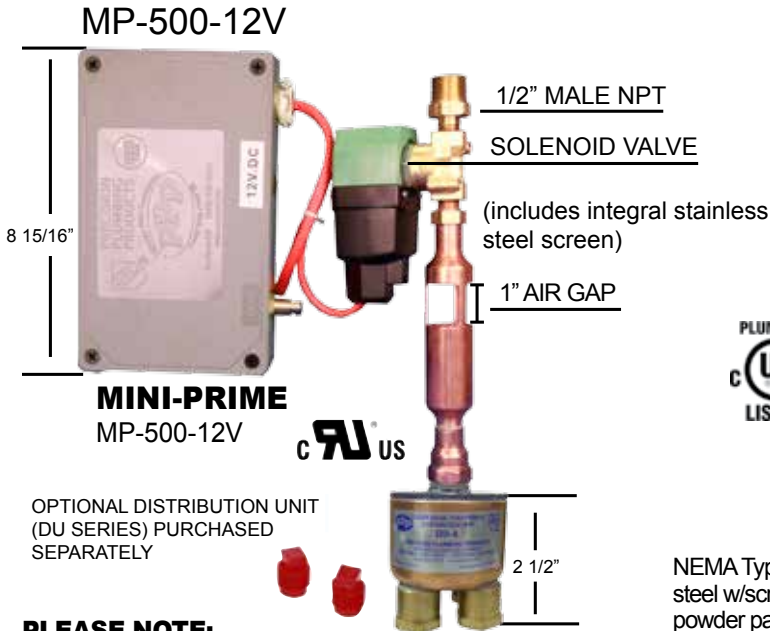

MINI-PRIME W/BOX
 MPB-500-12V

ROUGH-IN DIMENSIONS

- A. 12 INCHES
- B. 12 INCHES
- Depth 4 INCHES

NEMA Type 1, UL 50, 12" x 12" x 4" - 16 gauge steel w/screw on cover ANSI 61 gray polyester powder paint.

OPTIONAL DISTRIBUTION UNIT (DU SERIES) PURCHASED SEPARATELY



PLEASE NOTE:

Designed for use with 1 to 4 floor drains. The trap primer valve make up line to floor drain is recommended to be a minimum of 12" off the finished floor before a 90° elbow can be installed. The furthest recommended distance of makeup line is approximately 20' to floor drain. Trap primer make up line must have a continuous slope to the floor drain (consult local code requirements).

RECYCLE TIMER BOX:

Pre-set timer opens once for 10 seconds every 24hrs.
 Dimensions - (L) 7 5/8" x (W) 4 5/8" x (D) 2 3/8"

INLET: 1/2"NPT Male. ANSI/ASME B1.20.1.

OUTLET: 1/2"NPT Female. ANSI/ASME B1.20.1

PROJECT SUBMITTAL MODEL # _____

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

DISTRIBUTION UNITS:

(DU Series) Drain Outlet: 5/8" and 1/2" Compression Fittings SAEJ512 -1/2" female NPT ANSI/ASME B1.20.1.

SOLDER JOINTS:

95-5 lead free. Containing lead not in the excess of 0.2%.

ELECTRICAL COMPONENTS:

Circuit Breaker, Test Switch, Timer, Solenoid Valve UL Listed. Electrical assembly listed per UL #:73.

TEMPERATURE/PRESSURE:

32°F-125°, 20 PSI-150 PSI. Minimum 2 oz. water at 20 PSI per drain served.

ACCESS DOOR FOR MP-500 Model:

D-814PC, D-814SS, F-814PC, F-814SS.

US PATENT NUMBER 5,797,419 CANADIAN PATENT NUMBER 2,174,578

Precision Plumbing Products

Division of JL Industries, Inc.

802 SE 199th Ave
 Portland, Oregon 97233

T (503) 256-4010
 F (503) 253-8165

www.pppinc.net

