

METAL LAUNDRY BOX WITH WATER HAMMER ARRESTORS

Boxes are supplied with water hammer arrestors and quarter turn valves. Boxes include necessary mounting brackets and faceplate. Metal boxes include a 2" rubber drain pipe coupling and are constructed of 20 gauge steel with a white powder coat. (Note: Box dimensions may vary slightly from drawings).



INSTALLATION:

The Laundry Box is supplied with valves and water hammer arrestors. A 2" rubber drain pipe grommet is included with the metal box assembly.


Position the box between studs to desired height. Nail or screw the mounting ears to the studs.

Slide the box out until the front side of the box will be flush with the first layer of sheetrock or fire board.

Tighten the mounting ears screws firmly. This must be done prior to sheetrock installation. Sheetrock thickness (3/8", 1/2", 5/8").

Install drain pipe.

Make plumbing connections to both the hot and cold valves.

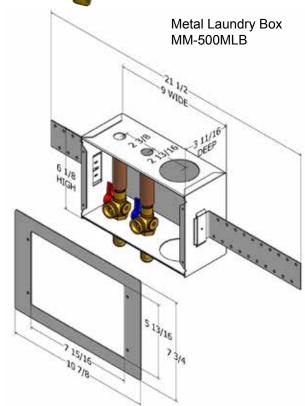



Precision Plumbing Products

Division of JL Industries. Inc.

802 SE 199th Ave Portland, Oregon 97233 T (503) 256-4010 F (503) 253-8165 www.pppinc.net











