




Precision Plumbing Products

"Specify with Confidence - Install with Pride"®

MM-500ST WATER HAMMER ARRESTOR

www.pppinc.net

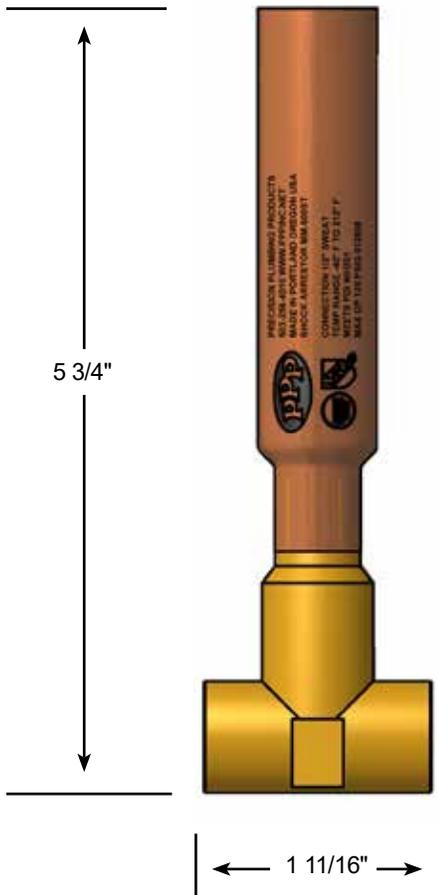

INTERNAL  
PRECHARGE  
60 PSIG

3/4" TYPE "L"  
COPPER

1/2" SWEAT

**INSTALLATION:** May be installed in new or existing plumbing systems with a standard pipe tee.

**MAINTENANCE:** Maintenance free – the piston is the only moving part.

**TEMPERATURE RANGE:** 32°F to + 212°F (0°C to + 100°C)

**CONSTRUCTION:** Barrel-fabricated of type "L" hard drawn copper.

**Cap:** Brass.

**Piston:** Polycarbonate Dow Calibre 2061-15 MFR.

**Seals:** "O"rings: EPDM.

**Seal Lubricant:** Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

**OPERATING PRESSURE:** Designed to operate on all domestic and commercial systems.

Normal operating pressure: 35 to 125 PSIG.

Max Spike pressure: 250 PSIG.

PROJECT SUBMITTAL

Project: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Date Submitted: \_\_\_\_\_

Prepared By: \_\_\_\_\_

Precision Plumbing Products

Division of JL Industries, Inc.

Patent No 3,633,627



JL Industries, Inc.

802 SE 199th Avenue  
Portland, Oregon 97233

T (503) 256-4010  
F (503) 253-8165

www.pppinc.net

NSF/ANSI 61 Certified



Rev 02/20