




Precision Plumbing Products

"Specify with Confidence - Install with Pride"®

MINI-MAX CPVC FITTING RESIDENTIAL ARRESTORS

www.pppinc.net

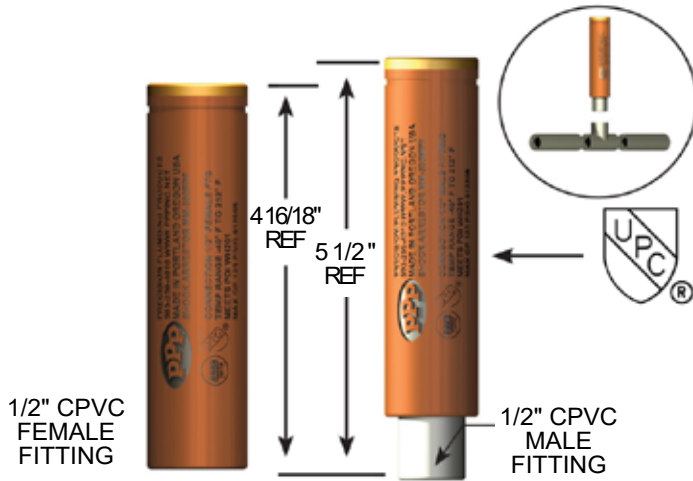

MM-500FPF

MM-500MPF

LEAD FREE

A maintenance free installation is assured when using this type of arrestor... the only moving part is the free-moving piston furnished with "O" ring seals which have been tested for reliability in excess of normal operating ranges.

FEATURES:

- 1/2" Female or Male Fitting
- Only One Moving Part
- Maintenance Free

MAINTENANCE: Maintenance free – the piston is the only moving part.

TEMPERATURE RANGE: 32°F to + 212°F (0°C to + 100°C)

CONSTRUCTION: Barrel-fabricated of type "L" hard drawn copper.

Cap: Machined from free turning brass..

Piston: Polycarbonate Dow Calibre 2061-15 MFR.

Seals: "O"rings: EPDM.

Seal Lubricant: Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

OPERATING PRESSURE: Designed to operate on all domestic and commercial systems. Normal operating pressure 35 to 125 PSIG Max spike pressure 250 PSIG.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

Patent No 3,633,627

Precision Plumbing Products

Division of JL Industries, Inc.



802 SE 199th Avenue
Portland, Oregon 97233

T (503) 256-4010
F (503) 253-8165

www.pppinc.net

NSF/ANSI 61 Certified



Rev 02/20