




**Precision Plumbing Products**  
*"Specify with Confidence - Install with Pride"*

**LEAD FREE**

**MM-500 STRAIGHT PEX AND PROPEX RESIDENTIAL ARRESTORS SUBMITTAL**

1/2" MINI - SIZE AA

www.pppinc.net

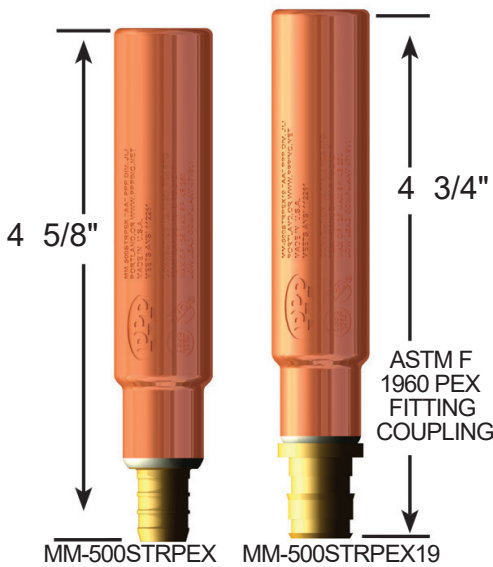

**INSTALLATION:** May be installed in new or existing plumbing systems with either standard PEX or standard Uponor piping.

**MAINTENANCE:** Maintenance free – the piston is the only moving part.

**TEMPERATURE RANGE:** 32°F to + 212°F (0°C to + 100°C)

**CONSTRUCTION:** Barrel-fabricated of type "L" hard drawn copper.

**Cap:** Brass.

**Piston:** Polycarbonate Lexan 124R.

**Seals:** "O"rings: EPDM.

**Seal Lubricant:** Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

**OPERATING PRESSURE:**  
 Designed to operate on all domestic and commercial systems.  
 Normal operating pressure 35 to 125 PSIG. Max Spike pressure 250 PSIG.

**PROJECT SUBMITTAL**

Project: \_\_\_\_\_

Contractor: \_\_\_\_\_

Engineer: \_\_\_\_\_

Date Submitted: \_\_\_\_\_

Prepared By: \_\_\_\_\_



**Precision Plumbing Products**

Division of JL Industries, Inc.

802 SE 199th Ave  
 Portland, Oregon 97233

T (503) 256-4010  
 F (503) 253-8165

www.pppinc.net

Patent No 3,633,627



Rev 07/18