



## Precision Plumbing Products

*"Specify with Confidence - Install with Pride"*

### PRIME-TIME ELECTRONIC TRAP PRIMING ASSEMBLY FLUSH MOUNT

www.pppinc.net

It's PRIME-TIME to meet your floor drain trap priming needs. This unique trap priming assembly Automatically maintains a constant water seal in floor drain traps and is available in 4 through 30 opening configurations and all the contractor needs to do is simply supply the potable water and power, Precision supplies the rest...

#### FEATURES:

- ATMOSPHERIC VACUUM BREAKER
- PRE-SET 24 HOUR ADJUSTABLE TIMER
- MANUAL OVER RIDE SWITCH
- 120v OR 220v SOLENOID VALVE
- 3/WIRE SINGLE POINT CONNECTION
- 3/4" FNPT CONNECTION
- 3/4" FNPT CONNECTION
- CALIBRATED MANIFOLD FOR EQUAL WATER DISTRIBUTION
- 5/8" OR 1/2" OUTLET COMPRESSION OR 1/2" PEX AND PROPEX FITTINGS
- FOUR OPENING MANIFOLD TO THIRTY OPENING MANIFOLD
- FLUSH MOUNT CABINETS - AVAILABLE AS FIRE RATED, CALL FACTORY FOR QUOTE

#### FLUSH MOUNT CABINETS

The Electronic Priming Assembly pictured is available in five separate configurations. The model PT-4 offers a four opening manifold capable of priming four separate floor drain traps from a single control unit. Models PT-6 through PT-12 provide the same features only expanding to a total of twelve floor drains. All manifolds are available in either 1/2" or 5/8" compression, 1/2" PEX or PROPEX fittings.

**Part Number:**  
PT-4, PT-6, PT-8,  
PT-10, PT-12

**Cabinet Dimension:**  
ID 14" W x 16" H x  
3-3/8"D

**Access Door Part  
Number:**  
D-1416PC  
D-1416SS



The Electronic Priming Assembly pictured is available in a single configuration but is capable of priming from thirteen to twenty separate floor drain traps from a single control unit. The manifold is available in either 1/2" or 5/8" compression, 1/2" PEX or PROPEX fittings. This model serves 13 to 20 drains.

**Part Number:**  
PT-1320  
**Cabinet Dimension:**  
ID 20-1/2" W x 16-1/2"  
H x 3-3/8" D  
**Access Door Part  
Number:**  
D-1620PC  
D-1620SS



The Electronic Priming Assembly pictured is available in a single configuration but is capable of priming from twenty one to thirty separate floor drain traps from a single control unit. The manifold is available in either 1/2" or 5/8" compression, 1/2" PEX or PROPEX fittings. This model serves 21 to 30 drains.

**Part Number:**  
PT-2130  
**Cabinet Dimension:**  
ID 30-1/2" W x 20-1/2" H  
x 3-3/8"D  
**Access Door Part  
Number:**  
D-2030PC  
D-2030SS



The PRIME-TIME PRIMING ASSEMBLY will supply a minimum of 2 oz. of potable water at 20 PSIG at a preset factory setting of 6 seconds every 24 hours. The entire unit is pre-assembled in a steel cabinet ready to be flush wall mounted.

**SPECIFICATIONS**

<b>COMPRESSION FITTINGS:</b>	
1/2" Comp. for 3/8" ID Copper Line	
5/8" Comp. for 1/2" ID Copper Line. This line is the floor drain trap make-up water line.	
1/2" PEX	
1/2" ProPEX Uponor	
<b>CABINET:</b> 16 Gauge Steel	
Dry Wall, Flush Mount (In Wall) Cabinet Depth 4", Mounting Anchor Provided	
Fire Rated, Flush Mount (In Wall) Cabinet Depth 6", Mounting Anchors Provided	
<b>ACCESS DOOR:</b> Dry Wall	
Prime Coat	
Stainless Steel	
<b>ACCESS DOOR LATCH:</b>	
Screw Driver - Standard	
Allen Key	
Cylinder Lock	
<b>ACCESS DOOR:</b> Fire Rated	
Prime Coat	
Stainless Steel	
<b>ACCESS DOOR LATCH:</b>	
Ring Pull - Standard	
Cylinder Lock	
<b>VOLTAGE:</b>	
120 Volt 60 Hz./110 Volt 50 Hz.	
240 Volts 60 Hz./220 Volts 50 Hz.	

**ELECTRICAL SPECIFICATIONS:**

**120 VOLT PT**  
 120/60 6. Watts  
 110/50 16 VA Holding  
 34 VA In Rush


**240 VOLT PT**  
 240/60 6. Watts  
 220/50 16 VA Holding  
 34 VA In Rush

**MODEL # PT- \_\_\_\_\_**  
**PT-1320 - # of drains served: \_\_\_\_\_**  
**PT-2130 - # of drains served: \_\_\_\_\_**

(Please refer to list on the right for dimensions of cabinet models).  
 Unit must be installed plumb and must be installed with access.  
 Must be installed above finished floor. Allow one foot of elevation  
 for every 20 feet of distance ran for floor drain make up line.

**PROJECT SUBMITTAL**

Project: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Date Submitted: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

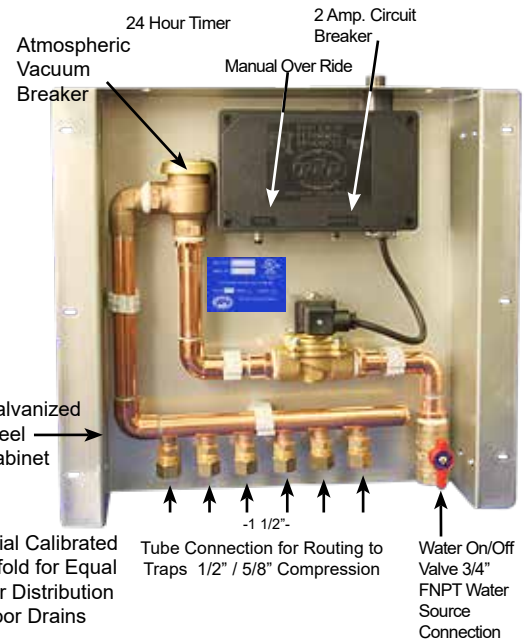

**CABINET DIMENSIONS:**

**MODEL # PT-4 - PT-12 ID Width 14" x Height 16"**  
**MODEL # PT-1320 ID Width 20 1/2" x Height 16 1/2"**  
**MODEL # PT-2130 ID Width 30 1/2" x Height 20 1/2"**

**DEPTH OF CABINET:**  
 Standard 3-3/8", Fire Rated 6"

**INLET:**  
 3/4" inch NPT female. ANSI/ASME BI.20.1.

**OUTLET:**  
 5/8" or 1/2" inch compression fitting. SAEJ512.

**MANIFOLD:**  
 3/4" Type "L" copper tubing. ASTM B88.

**SOLDERED JOINTS:**  
 95-5 lead free containing lead not in excess of 0.2%.

**ELECTRICAL COMPONENTS:**  
 Circuit Breaker, Test Switch, Timer, Solenoid Valve marked as UL listed.  
 Electronic assembly tested and certified per UL #73.

**BACKFLOW PREVENTION:**  
 Anti-Siphon atmospheric vacuum breaker meets Los Angeles code, IAPMO, New York Board of Standards, ASSE 1001 and CSA.

**METAL CABINET:**  
 16 gauge steel, galvanized.

**ACCESS DOOR:**  
 Optional: Prime Coat, Stainless Steel, and Fire Rated.

**TEMPERATURE/PRESSURE:**  
 32°F - 125°F, 20 PSI - 150 PSI.

NOTE: UNIT MUST BE INSTALLED PLUMB.  
 - MUST BE INSTALLED WITH ACCESS.  
 - ALL PRIME-TIME FLUSH MOUNT UNITS ARE AVAILABLE IN  
 FIRE RATED CABINETS - 6" IN DEPTH.

**Precision Plumbing Products**

Division of JL Industries, Inc.  
 802 SE 199th Ave.  
 Portland, Oregon 97233  
 T (503) 256-4010  
 F (503) 253-8165  
 www.pppinc.net



PATENT NO. 5,253,670

