



Precision Plumbing Products

"Specify with Confidence - Install with Pride"®


LEAD FREE

MM-5001FCT and MM-5002FCT RESIDENTIAL ARRESTORS SUBMITTAL


www.pppinc.net

3/8" FEMALE COMP "T"

5/8" FEMALE COMP "T"

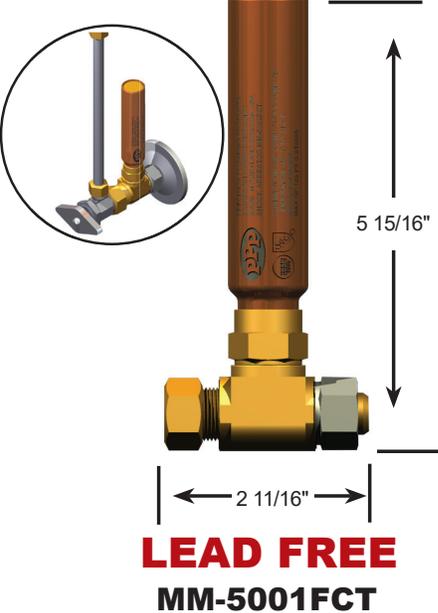

LEAD FREE
MM-5001FCT

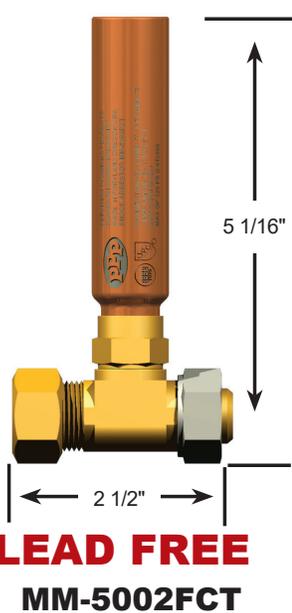

LEAD FREE
MM-5002FCT

INSTALLATION: May be installed in new or existing plumbing systems with sweat connection piping.

MAINTENANCE: Maintenance free – the piston is the only moving part.

TEMPERATURE RANGE: 32°F to + 212°F (0°C to + 100°C)

CONSTRUCTION: Barrel-fabricated of type "L" hard drawn copper.

Cap: Brass.

Piston: Polycarbonate Lexan 124R.

Seals: "O"rings: EPDM.

Seal Lubricant: Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

OPERATING PRESSURE: Designed to operate on all domestic and commercial systems. Normal operating pressure 35 to 125 PSIG. Max Spike pressure 250 PSIG.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

Precision Plumbing Products

Division of JL Industries, Inc.

802 SE 199th Ave
Portland, Oregon 97233

T (503) 256-4010
F (503) 253-8165

www.pppinc.net



Patent No 3,633,627

NSF/ANSI 61 Certified



Rev 02/20